



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

1304152486

MAILED 24 NOV 2004

WIPO

PCT

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

03104417.5

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**



Anmeldung Nr:  
Application no.: 03104417.5  
Demande no:

Anmeldetag:  
Date of filing: 27.11.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Storage system for retaining identification data for enabling retrieval of media content

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G06F17/30

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

**Storage system for retaining identification data for enabling retrieval of media content**

The invention relates to a data storage system for obtaining identification data for media content. The invention also relates to a method of storing data and a computer program product.

5

US2002//0140843 discloses a digital camera for capturing digital images and recording meta-data. The meta-data may be specific to the operational conditions of the recording device during the capture, and attached to the digital images. For example, the meta-data may include information such as a focusing distance, date, time, etc. The meta-data may be used for identifying classifiers, i.e. semantic descriptions associated with the captured video content. The digital images and the meta-data are transmitted to a data processing system.

Devices for obtaining media content, for example, the camera as described in US2002//0140843, or a video recorder arranged to receive video signals, may have a temporary storage means or a storage means with limited capabilities. Therefore, the media content has to be transferred to another storage, overwritten or deleted, and the content may not be found anymore.

It is an object of the invention to provide a system which allows for finding the media content which had been present in the system before the media content was removed or deleted.

The object is realized in that the invention provides for a data storage system comprising:

- a processor means for obtaining identifier data of media content existing in the system, the identifier data being for identifying the media content, and
- a memory for retaining the identifier data after the media content is absent from the system,

- a retrieval means being arranged to enable retrieval of the media content using the identifier data.

For example, the data storage system may obtain the media content and identifier data in a digital stream. Alternatively, the system may obtain only media data, without the identifier data, and the identifier data may be generated independently, e.g., locally in the system. The identifier data is data which allows for identification of the media content when the media content is not in the system anymore, e.g., when the content is removed, and retrieval of the media content using the identifier data.

10 The media content may be obtained in different ways. For example, the system may comprise one or more content recording devices, e.g., a video camera. Alternatively, the system may comprise a TV tuner, wireless communication means, an Internet modem, etc.

The system retains the identifier data after the media content is removed from the system, overwritten or deleted. The identifier data may accumulate in the system independently of the media content. It is an advantage of the present invention that the media content does not have to be stored in the system, but the media content may still be retrieved using the identifier data. To store the identifier data, a storage capacity may be required in the system significantly smaller than for storing the media content. For example, the system may comprise a mobile device with a relatively small-capacity storage, but the user may use the mobile device for obtaining the identifier data that allows retrieval of the media content when the media content is stored remotely to the system.

The identifier data may be attached to, for example, meta-data describing the media content. The meta-data may enable a user of the system to store with the identifier data any information about the media content, for example, a text description, a diary, etc. In another example, the identifier data may be the descriptive data, i.e., the meta data.

25 The identifier data may be obtained by analyzing the media content. For example, video information such as still images, video frames in a video stream, etc., may have unique characteristics, e.g., a size, type, format of the image, a mean absolute difference (MAD) value of the video stream according to the MPEG (Moving Picture Experts Group) standard. The MAD value may be extracted when the video data are MPEG-encrypted. In another example, the identifier data may simply be a unique combination of symbols assigned to the media content by the system, or a hash value.

The identifier data may comprise information sufficient to retrieve the media content stored elsewhere. For example, the identifier data may comprise storage identifier data indicating a storage device external to the system, and location data indicating location

of the media content in the external storage device. For instance, the storage identifier data may identify a personal computer (PC) in a home network of a user, and the location data may comprise information about a folder and/or a computer file name where the media content is stored on the PC.

5                   The processor means may be arranged to function as the retrieval means. Alternatively, the retrieval means may be implemented as a separate unit of the system, e.g., as a retrieval processor means suitably arranged to function as the retrieval means.

The object of the invention is also realized in that the method of storing data according to the present invention, comprises the steps of:

- 10               -           obtaining identifier data of media content existing in a data storage system, the identifier data being for identifying the media content,  
-               retaining the identifier data after the media content is absent from the system,  
and  
-               enabling retrieval of the media content using the identifier data.

15               The method describes an operation of the system according to the present invention.

20               These and other aspects of the invention will be further explained and described with reference to the following drawings:

Fig. 1 is a functional block diagram of an embodiment of a system according to the present invention;

25               Fig. 2 is a functional block diagram of another embodiment of a system according to the present invention, where the system comprises a video recording device and a personal digital assistant device (PDA);

Fig. 3 is a block diagram of a system according to the present invention, and a plurality of devices not comprised into the system;

Fig. 4 is an example of expressing the identifier data using a formal language;  
and

30               Fig. 5 is an embodiment of the method of the present invention.

Fig. 1 shows an embodiment of the system according to the present invention. The system 100 comprises a processor means 110 (further referred to as "processor") and a

memory 120. The system may optionally comprise an input unit 130, a content storage unit 140 and a communication unit 150.

The processor 110 may be coupled to the input unit 130 for obtaining media content by recording the media content, receiving the media content, etc. The input unit may  
5 comprise a photo camera for taking pictures, a video camera for shooting a film, a personal video recorder (PVR), a TV tuner, a computer equipped with a network card for connecting the computer to a data network, or any other device suitable for obtaining the media content. For example, the input unit may receive video data in a known manner from a video content broadcaster, e.g. using digital video broadcasting (DVB), video on demand systems, Internet  
10 radio systems, etc.

The media content may comprise at least one or any combination of visual information, audio information, text, or the like. The expression "audio data", or "audio content", is hereinafter used as data pertaining to audio comprising audible tones, silence, speech, music, tranquility, external noise or the like. The expression "video data", or "video  
15 content", is used as data which are visible such as a motion picture, static image, characters etc.

The input unit 130 may be arranged to read out the media content stored on different data carriers such as, audio tapes, video tapes, optical storage discs, e.g., a CD-ROM disk (Compact Disk Read Only Memory) or a DVD disk (Digital Versatile Disk),  
20 floppy and hard drive discs etc in any format, e.g. MPEG (Moving Picture Experts Group), MIDI (Musical Instrument Digital Interface), Shockwave, QuickTime, WAV (Waveform Audio), etc.

The content storage unit 140 may be arranged to store temporarily the obtained media content of different types and formats in a known manner. For example, the  
25 content storage unit may comprise a computer hard drive, a versatile flash memory card, e.g., a "Memory Stick" device, etc.

A user of the system may find the media content if the media content is stored in the system. If the media content is removed or deleted from system, and the system does not store any information about the media content which is absent from the system, the  
30 system does not allow for finding the media content anymore. The present invention aims at enabling the system to retrieve or to enable retrieval of the media content. For that aim, the system comprises the memory 120 for retaining the identifier data after the media content is absent from the system. The identifier data may be any data which allows for said retrieval.

For example, the identifier data may be a record in the memory 120 indicating a name of a particular media content item. The name may be attached to the content item and stored with the content item in another device, not comprised into the system. Of course, this is merely a simple example, and the identifier data may be more complex.

5           The processor 110 may be arranged to obtain the identifier data in different manners. For example, the identifier data may be obtained together with the media content. Audio or video fragments, e.g., MPEG data frames, of the media content with meta-data, comprising the identifier data, attached to or embedded in the fragments (for instance, a MPEG-data file with a header comprising information about the media content) may be  
10       obtained by the input unit. For instance, in Digital Video Broadcast (DVB) systems, a number of digital streams are transmitted carrying video data, audio data and additional information, which may comprise the identifier data. The processor may be arranged to extract the identifier data from the received media content with the meta-data. A provider of the media content may provide the media content item with a pre-determined serial code  
15       being unique, for instance.

          In another example, the processor may be arranged to generate identifier data for the media content item. The processor may analyze the media content and generate the identifier data on a basis of the content of the item. Since every item has its unique content, the identifier may also be characteristic of only the particular item. For instance, a movie  
20       usually has a unique year of its production or release, a specific title. That information may be used for generating a short code for the particular content item in accordance with certain algorithms. The analysis of the media content may also comprise, for example, using video or audio characteristics of the media content.

          In a further example, the processor may be arranged to interrogate a storage  
25       device (not shown) external to the system, i.e., the device which is not comprised into the system, to provide the identifier data for the particular media content item. The external device may be arranged to obtain the identifier data in any manner which results in the identifier suitable to recognize the content item unambiguously. For instance, the identifier data may comprise a storage identifier, e.g., a link, address, or the like, of the external device  
30       and the identifier generated by that device, e.g., location data indicating location of the content item in the device. As an example, such location data may be a name of the computer/hard-drive disc, a name of a folder and/or a name of a file comprising the media content item, e.g., "PC-name:\disc-name\folder-name\file-name" (in that case, the file name might have been generated by the computer). The external device may generate and transmit

the identifier data after the system has transmitted the media content, e.g., by means of the communication unit 150, to the external device, and the content is not available in the system anymore.

In the example with the external storage device, the processor may control the communication unit to communicate the external storage device. After the media content is offloaded to the external device and the device has generated the identifier data, the external device may transmit the identifier data to the system. For instance, the processor may receive, from the external device, the identifier data in a return receipt for the media content, acknowledging the reception and storage of the media content in the external device.

In a further example, the external device may not be arranged to generate or store the identifier data after the reception of the media content from the system. Before the media content is removed from the system or deleted in the system, the processor may execute a software program to generate identifier data for the content item and store the generated identifier data in the memory. The identifier data may be retained in the memory after the content is not in the system. The software may generate the same identifier data independently of where it is run, and independently of where the content item is stored. To enable retrieval of the media content item, the processor may transmit the software program to the external storage device, for example. The external device may be arranged to execute the software to generate the identifier data for the media content items stored in the external device. The identifier data for one of the items stored in the external device will match with the identifier data retained in the memory of the system for the particular item. The processor may be arranged to detect such a match between the identifier data stored in the memory of the system and the identifier data generated in the external device. Upon the detection of the match, the media content corresponding to the identifier data may be retrieved from the external device to system or any other equipment not comprised into the system, e.g., to a further external device.

The processor may be arranged to enable the user to input the identifier data using the input unit. The input unit may comprise generally known input devices such as a remote control unit, a keyboard, a pointing device like a mouse etc. For instance, the user may input the identifier data for the particular media content item and a command for the processor to transfer the item to an external storage device. The identifier data may comprise the storage identification information for identifying the external storage device to which the content item is to be transferred. Thus, the user may specify the external storage device using the input unit.



The system 100 shown in Fig. 1 may be the video camera for recording video the media content. The camera may be arranged to accumulate information about the content recorded with the camera. The information, e.g., a time, date, place of recording (e.g., a geographical location where the content has been recorded), an identity of a person who operated the camera, etc, may be generated automatically. That information may be used to generate the identifier data, for example, by retaining in the memory the time and date when the video was recorded.

In another embodiment, the system 100 may be a personal video recorder. The video recorder may be arranged to receive the media content with the identifier data embedded therein, or to receive the media content item and generate the identifier data. The video recorder may generate the identifier data, for example, by applying a speech recognition technique to the audio data in the MPEG stream, utilizing the recognized speech text to identify in a multi media content database. The database may comprise different information about the content items, such as a title, year of production, author, summary, duration, etc. Alternatively, if the media content item is provided with EPG (Electronic Programme Guide) data, the identifier data may also be generated on the basis of information about the content item available in the EPG data. For example, it is well known that the EPG data may comprise information about actors in a movie, a TV channel broadcasting the respective content item on a certain day and certain hours, etc. The processor 110 of the video recorder may be arranged to obtain said information about the content item and associate it with a certain code which is also the identifier of the content item. Both the information and the code may be retained in the memory. For instance, the code may simply be a number given to the content item and stored in the memory, or a date/time when the identifier data is recorded in the memory.

Fig. 2 shows an embodiment of the system 200 of the present invention. The system comprises the personal digital assistant device (PDA) 210 and the video camera 250. The system may be arranged to communicate with an external content storage 299, e.g., a home server in a user's home network.

The devices of the system may be mobile and may need a wireless infrastructure for communicating with each other, as well as with the remote external storage. The devices requiring a wireless network bandwidth for transferring large amounts of information may be connected using existing technologies, such as Blue-tooth, 802.11[a-g], etc.

The camera may comprise a recorder unit 255 for taking digital pictures, a processor 260 for generating the identifier data, a memory 265 for retaining the pictures, a video storage unit 270 for storing temporarily the pictures until the pictures are offloaded from the camera, and a communication unit 275 for offloading the pictures and

5 communicating with the PDA.

The PDA may comprise a user input unit 215 for enabling a user to provide his input to the PDA, a display 220 for displaying information to the user, a control circuit 225 for enabling the PDA to function as will be further explained, and a communication unit 230 for communicating with the camera and any other device (including the home server, etc.) to ensure enabling the retrieval of the media content. The communication unit 230 of the PDA and the communication unit 275 of the camera may be arranged to communicate using the wireless network, for example.

The system shown in Fig. 2 may be used in accordance with a scenario described below merely as an example. The user uses his digital camera to take pictures during his holiday. The camera attaches a time/date stamp to the pictures taken, e.g., by means of the processor 260. When the user returns home, he transfers the images from his camera to the home server for storing them. Thus, the home server stores the images and the time/date stamp. The camera may generate the identification data comprising the time/date stamp and an indication that the images are stored in the home server, and retain the identification data in the memory 265. The user also keeps his diary on the PDA while being on holiday. The user describes in the diary certain pictures which he takes with his camera. The time and the date, when the picture is taken, is also stored in the diary at the PDA, as well as in the camera, so that corresponding pictures may be identified in the PDA and the camera. To store the diary and the time/date for the images, the PDA may comprise a

15  
20  
25

Alternatively, the PDA may store the time/dates and corresponding descriptions of the pictures. The camera may store the pictures, the time/dates and the identifier data (not being the time/date), e.g., the hash value. After the pictures are deleted in the camera, the home server may store the pictures and the identifier data, not including the time/date.

30

After the user returns from his holiday, he likes to show some photos to his friends. The user visits his friends and takes the PDA with him. The user browses his diary using the PDA and presses a button to show the picture corresponding to a particular entry in the diary. The PDA communicates with the camera, which the user left at home, and sends to

the camera a request for finding the particular image which was recorded by camera at the particular time and date. In other words, the PDA requests help with a task of finding the image, and the camera is able to perform the task. The camera is able to provide the requested information to the PDA because the camera retained the identification data and the identification data indicates that the images are stored in the home server of the user. Thus, the request of the PDA may be translated into a specific pointer to the home server for storing the content.

The PDA may be arranged to determine a display device, generally, a presentation device, which is available at the moment for displaying the user's content at the place of friends of the user. That may be realized through advertising techniques. The PDA may send a request for the display device in a local home network of the friend's place. For example, a television set may be connected in the local network and may display the images. The display device in the home network of the friends sends a reply message to the PDA with a specification of video formats of content that the display device may display. Of course, the PDA may be arranged to communicate with the devices in the local home network in the known manner. Thus, the PDA tries to display the required images as local to the user as possible, provided that the display device in the local network of the friends is able to obtain the content from the home server of the user.

Therefore, the PDA obtained the information about where the required images are stored, where the required images may be displayed, and how to find the images in the home server (on the basis of the time/date stamp attached to the images). That information enables the PDA to initiate the retrieval of the required images from the home server to the display device. The PDA may be arranged to find a service which will be able to establish a content stream, i.e., the content transfer. The home server may be arranged to provide such a service to the PDA, and the PDA sends to the home server the time/date stamp of the images to be transferred to the television set. For example, the home server, a content source device, may be connected with the television set, a sink for the content stream. The remote home server further communicates with the television set in the local network to display the images in the known manner. The home server provides the content to the television set. The television set, PDA and home server may interact in accordance with the UPnP (Universal Plug and Play) standard.

In fact, the PDA stores inventory of information about pictures taken by the camera, and the inventory may be used for a remote access and the retrieval of the pictures. The camera may also generate and store information about the identity of the user and a

location at which the respective picture is taken, e.g., by using the known GPS (Global Positioning Systems) techniques. The PDA is an object which the user may bring along to his friends when the pictures should be displayed at the friends' place. When the pictures should be displayed, the connection between the home server and the display device is set up.

5           Fig. 3 shows a diagram illustrating the present invention. The system comprises a device 310, e.g., the video recorder arranged for storing the identifier data. A plurality of remote storage devices, e.g., remote video recorders 320 and 330 may be arranged to establish connection with the system 310 via a point-to-point (P2P) network in the known manner.

10           The system 310 may be arranged to receive the media content, for example, broadcast television programs. The system may retain the identifier data for the received programs, whereas the received programs may be deleted, offloaded or removed to any of the devices 320 and 330. In accordance with the present invention, the system may retrieve the programs which are not available in the system using the retained identifier data. For  
15           example, the video recorder 310 may retrieve the required television program from the remote device 330 storing the program, via the P2P network.

          The devices 320 and 330 may be any of various consumer electronic devices such as a television set (TV set) with a cable, satellite or other link, a video cassette recorder (VCR), a home cinema system, a CD player, a remote control device such as an I-Pronto  
20           remote control, etc.

          The identifier data may be expressed through use of, e.g., Extensible Markup Language (XML) whose standardization is pursued by the World Wide Web Consortium. An example of the identifier data expressed using the CLIPS (C Language Integrated Production System) language is shown in Fig. 4. CLIPS is a productive development and delivery expert  
25           system tool which provides a complete environment for the construction of rule and/or object based expert systems. Other languages may also be used.

          Fig. 5 shows an embodiment of the method of the present invention. The embodiment describes the operation of the system according to the present invention. Further modifications of the method may be derived as shown in Figs. 1, 2 and 3.

30           The method comprises step 510 of obtaining media content, for example, using the video camera for recording the video content, the personal video recorder for receiving and/ or recording video signals. In the other example, the system may comprise the PDA and the video camera.

At step 520, the identifier data may be obtained in different manners for the media content. For example, the identifier data may be received embedded in the media content stream, the identifier data may be generated, or a user may simply input manually the identifier data. The identifier data may be established while the media content is still in the system, or after the media content has been removed from the system or deleted.

Step 530 comprises the retaining of the identifier data after the media content is absent from the system. For example, the identifier data may be retained in the memory of the system as shown in Fig. 1 or Fig. 2. Alternatively, the identifier data themselves may be retained elsewhere, not in the system, but the system may be arranged to access the identifier data, for example.

At step 540, the retrieval of the media content is enabled, for example, by using the identifier data to determine the external storage device where the media content is stored, by transmitting the special software algorithms to the external storage device to identify the media content item stored therein, etc.

Various computer program products may implement the functions of the device and method of the present invention and may be combined in several ways with the hardware or located in different other devices.

Variations and modifications of the described embodiment are possible within the scope of the inventive concept. For example, the system according to the present invention may comprise a portable device for recording the audio data. In one example, the system may be arranged to identify a person whose voice is recorded, e.g., by analyzing the speech of the person and comparing results of the analysis with his audio profile data, in any known manner. In that way, the identity of the person may be established. The identity information together with the time/date of the recording may be used as the identifier data for the recorded audio data.

The use of the verb 'to comprise' and its conjugations does not exclude the presence of elements or steps other than those defined in a claim. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the system claim enumerating several means, several of these means can be embodied by one and the same item of hardware.

## CLAIMS:

1. A data storage system (100, 200) comprising:
  - a processor means (110, 260) for obtaining identifier data of media content existing in the system, the identifier data being for identifying the media content, and
  - a memory (120, 265) for retaining the identifier data after the media content is  
5 absent from the system,
  - a retrieval means (110, 260) being arranged to enable retrieval of the media content using the identifier data.
2. The data storage system of claim 1, wherein the retrieval means is arranged to  
10 enable retrieval of the media content which is absent in the system and stored in a first device (299) external to the system, from the first device to a second device external to the system.
3. The data storage system of claim 1, wherein the processor means is arranged  
15 to enable generating the identifier data by analyzing media content stored in a device (299) external to the system, for retrieval of the media content from said external device.
4. The data storage system of claim 1, wherein the processor means is arranged  
to receive the identifier data with the media content, or to generate the identifier data.
- 20 5. The data storage system of claim 1, wherein the processor means is arranged  
to obtain the identifier data after the media content is absent from the system.
6. The data storage system of claim 5, wherein the processor means is arranged  
25 to receive the identifier data from a device external to the system (299), the external device is  
arranged to obtain the identifier data (generated/extracted) for the media content.
7. The data storage system of claim 1, wherein the system further comprises a  
recorder (255) for recording the media content, and/or a storage means (140, 270) for storing  
the media content before the media content is absent from the system.

8. The data storage system of claim 1,  
- wherein the processor means is arranged to enable a user to input meta-data  
describing the media content, or

5 - wherein the processor means is arranged to enable a user to input the identifier  
data.

9. The data storage system of claim 1, wherein the identifier data comprise:  
- storage identifier data indicating a storage device (299) external to the system,  
10 the device being arranged to store the media content after the media content is absent from  
the system, and/or

- location data indicating location of the media content in the external storage  
device.

15 10. The data storage system of claim 1, wherein the identifier data relate to meta-  
data describing the media content, the meta-data comprise information about at least one of:  
- a time and/or a date when the media content is recorded,  
- a location where the media content is recorded,  
- a user identity information.

20 11. The data storage system of claim 1, wherein the processor means is arranged  
to:

- select meta-data describing a desired media content,  
- find the identifier data corresponding to the selected meta-data,  
25 - determine a content storage device (299) where the desired content is stored,  
- determine a presentation device for presenting the content,  
- enable the presentation device to obtain the content from the content storage  
device.

30 12. At least one consumer electronics product being one of a video camera, a  
computer (PDA), a video recorder, or a remote control device, comprised in the data storage  
system in accordance to any of the preceding claims.

13. A method of storing data, the method comprising the steps of:

- (520) obtaining identifier data of media content existing in a data storage system, the identifier data being for identifying the media content,
- (530) retaining the identifier data after the media content is absent from the system, and
- 5 - (540) enabling retrieval of the media content using the identifier data.

14. A computer program product enabling a programmable device when executing said computer program product to function as the system as defined in claim 1.



**ABSTRACT:**

The invention relates to a data storage system (100, 200) comprising a processor means (110, 260) for obtaining identifier data of media content existing in the system, the identifier data being for identifying the media content, and a memory (120, 265) for retaining the identifier data after the media content is absent from the system, a retrieval means being arranged to enable retrieval of the media content using the identifier data. The system, for example, a video camera retains the identifier data after the media content is removed from the system or deleted. The identifier data may accumulate in the system independently of the media content, while the media content may still be retrieved.

10 Fig. 1

1/2

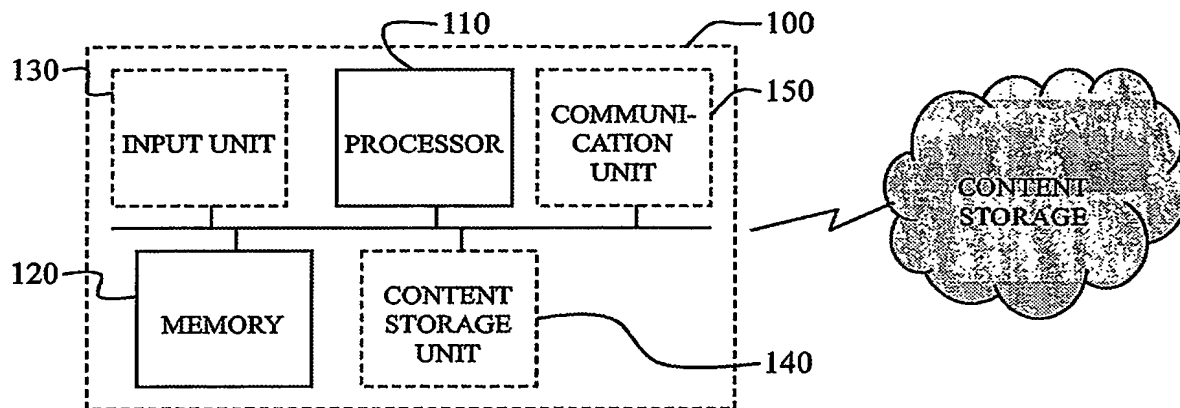


FIG. 1

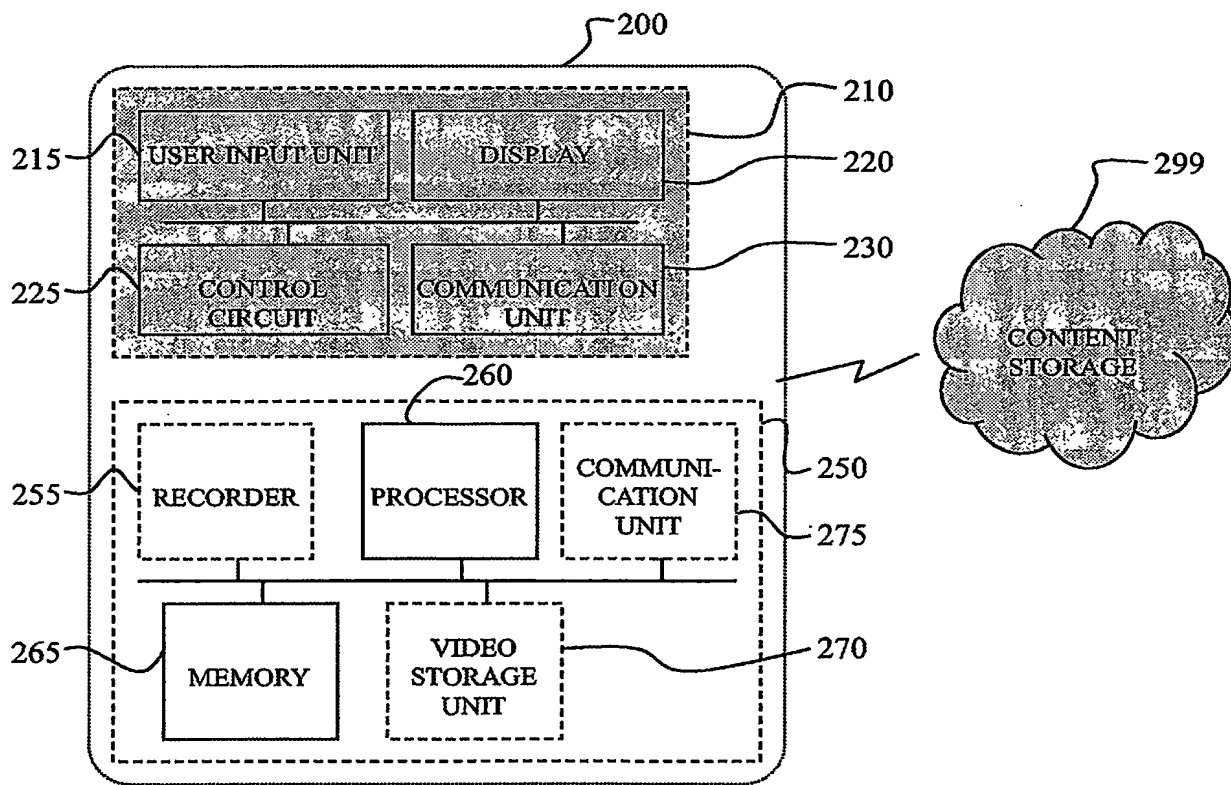


FIG. 2

2/2

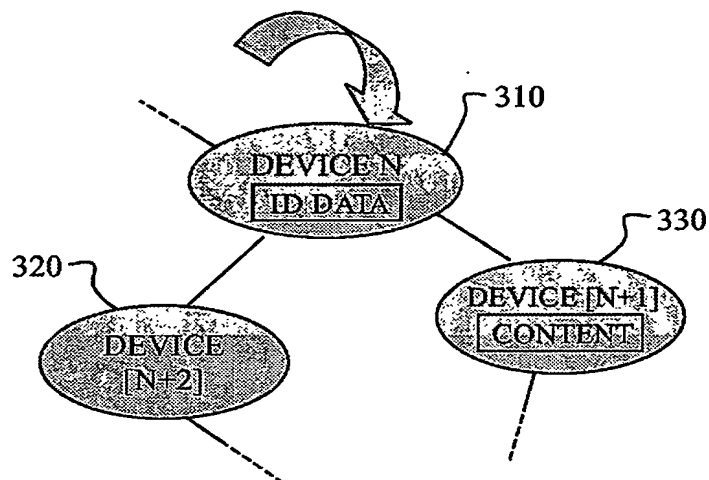


FIG.3

---

```

1 (deftemplate content-meta-dat
2   "meta data about recorded content"
3
4   (slot content-id
5     (type STRING)) ;specific content id
6   (slot creation-date
7     (type STRING)) ;creation date of the content
8 )

```

---

FIG.4

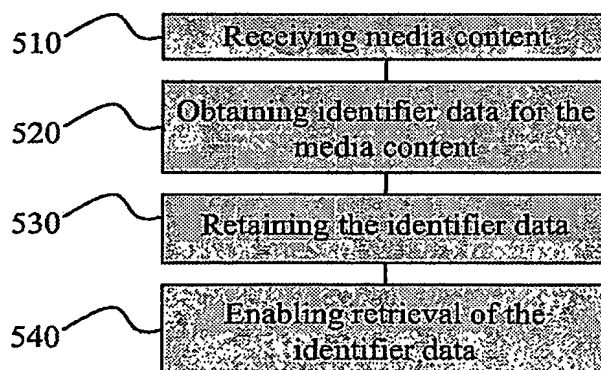


FIG.5

PCT/IB2004/052486

